


20 Years Sensor Expert
Professional Manufacturing

K18 Series Current Sensor

The K18 Series is a Open-Loop current sensor based on the Hall effect. It provides electronic measurement of DC, AC or pulse current at same time, and their combinations with galvanic between the primary (high current) and secondary circuits, PCB mount design is suitable for general low power applications.



Features

- Non-contact measurement of high current
- Output voltage proportional to carried current
- Max. measuring range $\pm 180\text{A}$ (DC or AC peak)
- RoHS Compliance (Lead-Free)

Applications

- Frequency converters
- Servo motor drives
- Battery management systems
- Welding applications

Advantages

- Compact design for general industrial measurement
- Excellent dv/dt performance
- Enhanced humidity and dust resistance
- High ESD sensitivity (Human Body Model) 8kV

Standards

- IEC60068-2 Series
- EN 61000-4 Series
- EN 55014-1: 2017
- EN 55014-2: 2015
- EN 50178: 1998
- IEC61800-3: 2017
- IEC61800-5-1: 2016

Absolute maximum ratings

Symbol	Parameter	Min.	Max.	Unit
$V_{DD\ max.}$	Maximum supply voltage (not destructive)	-18	18	V
I_{pm}	Maximum measuring current	- 180	180	A
T_A	Ambient operating temperature	-30	80	°C
T_S	Storage temperature range	-40	85	°C
$V_{ESD-HBM}$	ESD sensitivity HBM (Human Body Model)	4	8	kV

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

Specifications ($T_A = 25^{\circ}\text{C}$, $V_{DD} = \pm 15.0\text{V}$)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
V_{DD}	Supply voltage			$\pm 12 \dots \pm 15$		V
I_C	Current consumption	$I_p = 0\text{A}$ without load		14	18	mA
I_{pn}	Current nominal measuring range	K18-003D15	-9	± 3	9	A
		K18-005D15	-15	± 5	15	A
		K18-010D15	-30	± 10	30	A
		K18-015D15	-45	± 15	45	A
		K18-020D15	-60	± 20	60	A
		K18-025D15	-75	± 25	75	A
		K18-030D15	-90	± 30	90	A
		K18-040D15	-120	± 40	120	A
		K18-050D15	-150	± 50	150	A
		K18-060D15	-180	± 60	180	A
V_{OUT}	Output voltage	$\pm I_{pn}$		± 4		V
V_{OE}	Offset voltage	$I_p = 0\text{A}$ K18-003...030D15	-40		40	mV
		$I_p = 0\text{A}$ K18-040...060D15	-50		50	mV
ϵ_L	Non-linearity error	$\pm I_{pn}$ without offset		$< \pm 1$		%/ I_{pn}
V_{om}	Magnetic offset voltage @ $I_p = 0\text{A} \rightarrow I_{pn} \rightarrow 0\text{A}$	K18-xxxD15(xxx:003-030)			25	mV
		K18-xxxD15(xxx:040-060)			40	mV
T_{CVOUT}	Temperature coefficient of V_{OUT}	$T_A = -30 \dots 80^{\circ}\text{C}$ (except T_{CVOE})	-1		1	mV/°C
T_{CVOE}	Temperature coefficient of offset	$T_A = -30 \dots 80^{\circ}\text{C}$	-1.5		1.5	mV/°C
T_R	Step response to 90% of I_{pn}			3	5	μs
BW	Frequency bandwidth(-3dB)			50		kHz

Insulation characteristics

Symbol	Parameter	Value	Unit	Comment
V₀	Insulation voltage for isolation, 50Hz, 1 min	3600	V	
R_{ISO}	Isolation Resistance @500VDC	>500	MΩ	
D-CLE	Clearance	5.5	mm	Shortest distance through air
D-CRD	Creepage distance	5.5	mm	Shortest path along sensor body


General characteristics

Symbol	Parameter	Value	Unit	Comment
m-HSE	Housing material	V0		Flame retardant UL 94
m-CDT	Conductor material	H62		
m	Mass	8	grams	


Dimension (mm)

Pin	Symbol
1	$-V_{DD}$
2	GND
3	$+V_{DD}$
4	V_{OUT}
5	$+I_P$
6	$-I_P$

Current	Primary conductor
3A	$\phi 0.6\text{mm}$
5A	$\phi 0.8\text{mm}$
10A	$\phi 1.1\text{mm}$
15A	$\phi 1.4\text{mm}$
20A	$\phi 1.6\text{mm}$
25A	$\phi 1.6\text{mm}$
30A	$\phi 1.6\text{mm}$
40A	40A Busbar 1.0X6.3mm
50A	50A Busbar 1.0X6.3mm
60A	60A Busbar 1.0X6.3mm

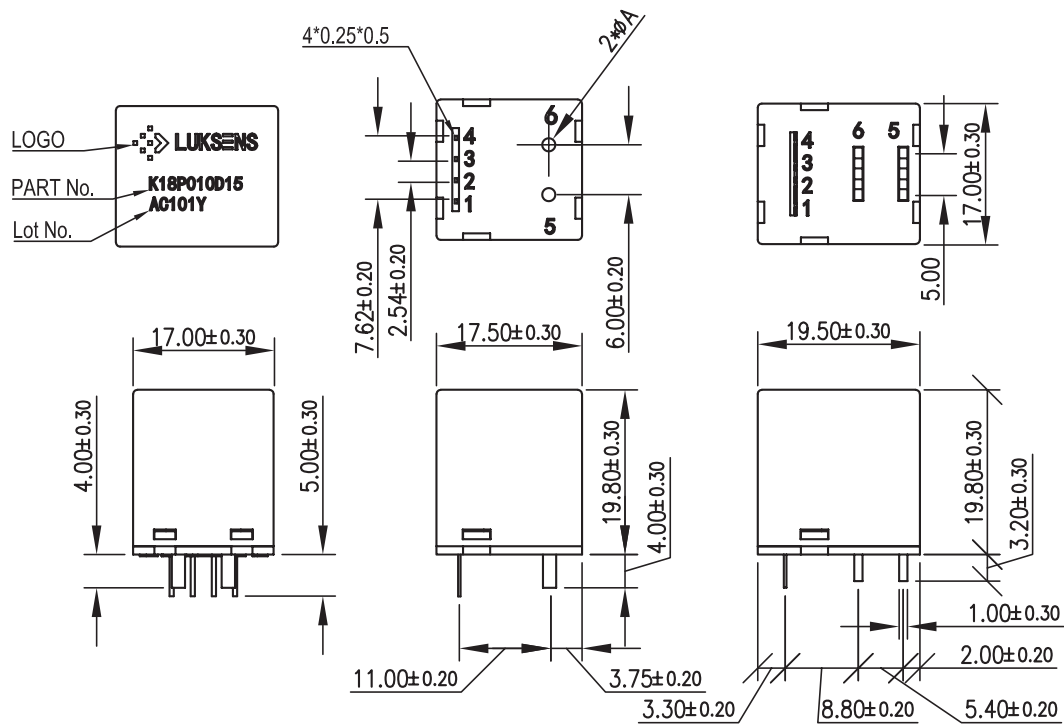

Name Guide Description

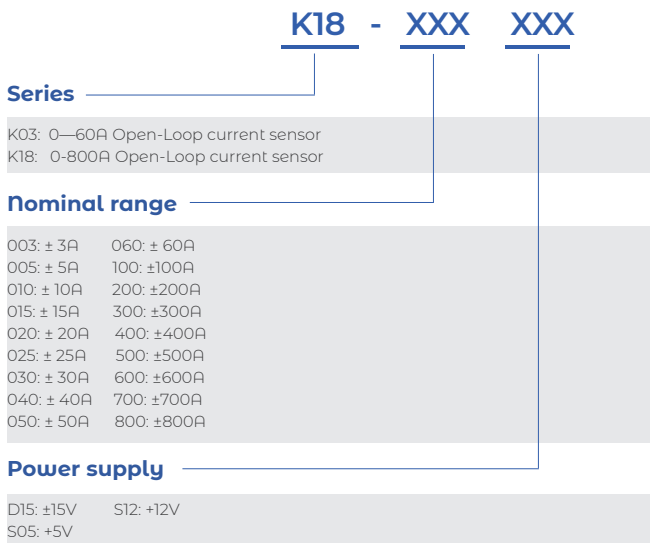

Notes

The content of this document is subject to revision without notice. Luksens shall have no liability for any error or damage of any kind resulting from the use of this document.

Safety and Environment



The product is to be installed by manufacturer trained personnel or competent person trained in accordance with manufacturer installation instructions.

With respect to applicable standards IEC 61010-1/ EN 61010-1 *safety requirements for electrical equipment for measurement, control and laboratory use part 1 general requirements*, the product should be used in limited energy secondary circuits.



Risk of electrical shock

Certain parts of the module can carry hazardous voltage during the operation process of the product because hazardous live voltage of primary conductor, power supply occurs, injury and/or serious damage will be caused if this warning is ignored.

Conducting parts must be inaccessible after installation of the product. Additional protection including shield or protective housing could be used according to IEC 60664 Insulation coordination for equipment within low-voltage supply systems.

Disconnection of the main supply will protect against possible injury and serious damage.



ESD protection

Damage from an ESD event will occur if the personnel is not well grounded when handling.

Important notice

Luksens reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Luksens advises its customers to obtain the latest version of the relevant information to verify, before placing any orders. The information included herein is believed to be accurate and reliable. However, since additional design, measure, production, quality control take effect in the end product, therefore Luksens shall have no liability for any potential hazards, damages, injuries or less of life resulting from the end product.

Luksens products are not to be used in any equipment or system, including but not limited to life support equipment or systems, where failure of Luksens products may cause bodily harm.