

# C03-30A Series Current Sensor

The C03-30A series provides efficient and precise sensor solutions for AC, DC, and pulse currents in industrial, commercial and communications systems. It consists of three main components: an accurate low temperature drift linear hall sensor, a flux collector, and a current transformer. It offers markedly low resistance, reducing power loss and temperature drift to deliver exceptional performance.



## Features

- Non-contact measurement of high current
- Output voltage proportional to carried current
- Max. measuring range  $\pm 85\text{A}$  (DC or AC peak)
- High sensitivity 27 mV/A
- Ratio metric output from supply voltage
- Nearly zero magnetic hysteresis
- Superior temperature stability and linearity
- High frequency bandwidth 30kHz
- Compact size for applications with limited space
- RoHs compliance (Lead-Free)

## Applications

- Home appliances
- Load detections and managements
- Switched-mode power supplies(SMPS)
- Welding applications
- Variable speed drives

## Advantages

- Accurately measures AC, DC and pulse currents
- High ESD sensitivity (Human Body Model) up to 8kV
- Rapid response, minimal noise output
- No insertion losses
- High immunity from external interference
- Excellent current overload capacity

## Standards

- EN55014-1: 2017
- EN55014-2: 2015
- EN50178: 1998
- EN61000-4 Series
- IEC60068-2 Series

## Absolute maximum ratings

Symbol	Parameter	Min.	Max.	Unit
$V_{DD\ max.}$	Maximum supply voltage (not destructive)	-0.3	7	V
$I_{PM}$	Maximum measuring current	-85	85	A
$I_{OUT\ max.}$	Maximum output current	-20	20	mA
$T_A$	Ambient operating temperature	-30	100	°C
$T_S$	Storage temperature range	-40	125	°C
$V_{ESD-HBM}$	ESD sensitivity HBM (Human Body Model)	4	8	kV

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

## Specifications ( $T_A = 25^\circ\text{C}$ , $V_{DD} = 5.0\text{V}$ )

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
$V_{DD}$	Supply voltage		4.5	5	5.5	V
$I_C$	Current consumption	$I_p=0\text{A}$ without load	3	5	8	mA
$V_O$	Zero current output voltage	$I_p=0\text{A}$ @ $T_A=25^\circ\text{C}$		$V_{DD}/2$		V
$I_{PN}$	Current nominal measuring range	DC or AC peak	-85	$\pm 30$	85	A
$R_L$	Output load resistance	$V_{OUT}$ to GND	5			k $\Omega$
$C_L$	Output load capacitance	$V_{OUT}$ to GND		10		nF
$G$	Nominal sensitivity	$V_{DD}=5\text{V}$	25.5	27	28.5	mV/A
$V_{OE}$	Offset voltage	$I_p=0\text{A}$	-75	$\pm 40$	75	mV
$T_{CVOE}$	Temperature coefficient of $V_{OE}$	$T_A=-30^\circ\text{C} \dots 100^\circ\text{C}$	-0.3	$\pm 0.1$	0.3	mV/°C
$T_{CVOUT}$	Temperature coefficient of $V_{OUT}$	$T_A=-30^\circ\text{C} \dots 100^\circ\text{C}$ (except $T_{CVOE}$ )	-0.5	$\pm 0.3$	0.5	mV/°C
$\epsilon_L$	Non-linearity error	$\pm I_{PN}$ without offset	-1.5		1.5	%/ $I_{PN}$
$BW$	Frequency bandwidth (-3dB)			30		kHz
$T_R$	Step response to 90% $I_{PN}$	(Design target)		5	10	$\mu\text{s}$


## Insulation characteristics

Symbol	Parameter	Value	Unit	Comment
<b>V<sub>o</sub></b>	Insulation voltage for isolation, 50Hz, 1 min	>1500	V	
<b>R<sub>ISO</sub></b>	Isolation resistance @500VDC	>500	MΩ	
<b>D-CLE</b>	Clearance	6.5	mm	Shortest distance through air
<b>D-CRD</b>	Creepage distance	6.5	mm	Shortest path along sensor body


## General characteristics

Symbol	Parameter	Value	Unit	Comment
<b>m-HSE</b>	Housing material	V0		Flame retardant UL 94
<b>m-CDT</b>	Conductor material	H62		0.3mΩ before welding on PCB
<b>m-FC</b>	Flux collector material	Mn-Zn ferrite		Superior magnetic permeability
<b>m</b>	Mass	5	grams	


## Typical supply current versus ambient temperature

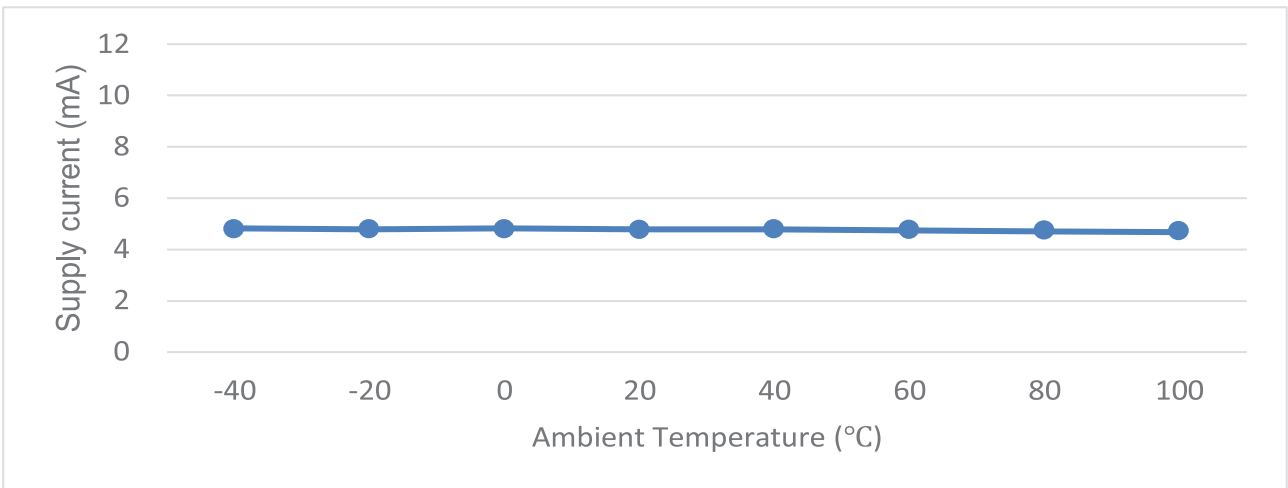


## Typical zero offset drift versus ambient temperature

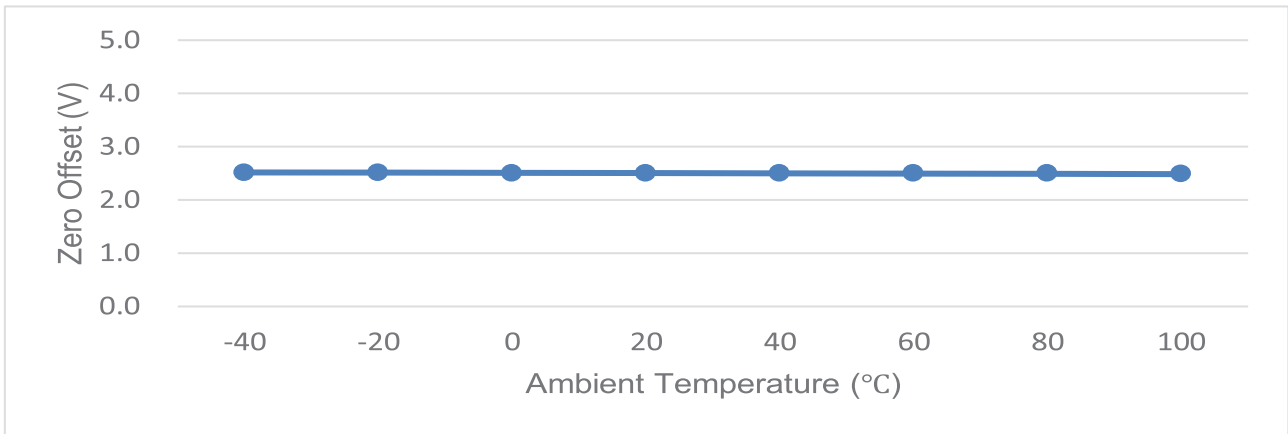


## Primary current input versus output voltage

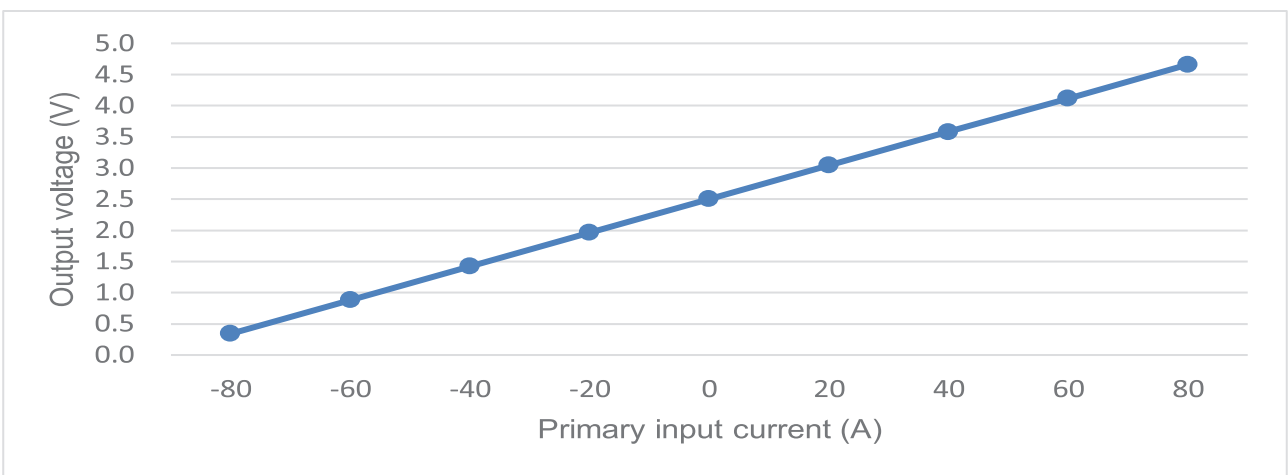

## Typical sensitivity drift versus ambient temperature

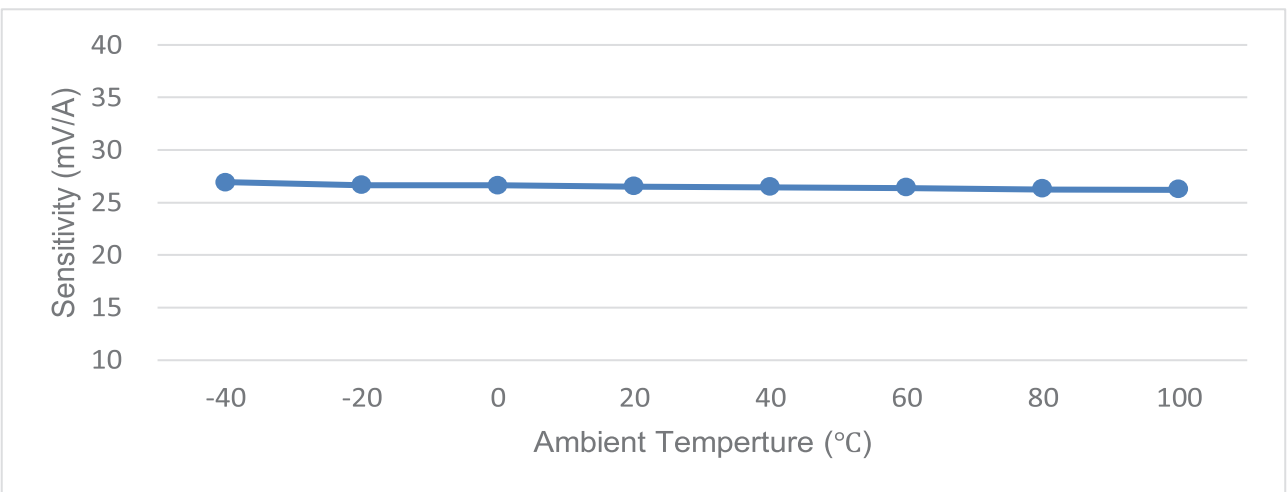

## PCB footprint (mm)

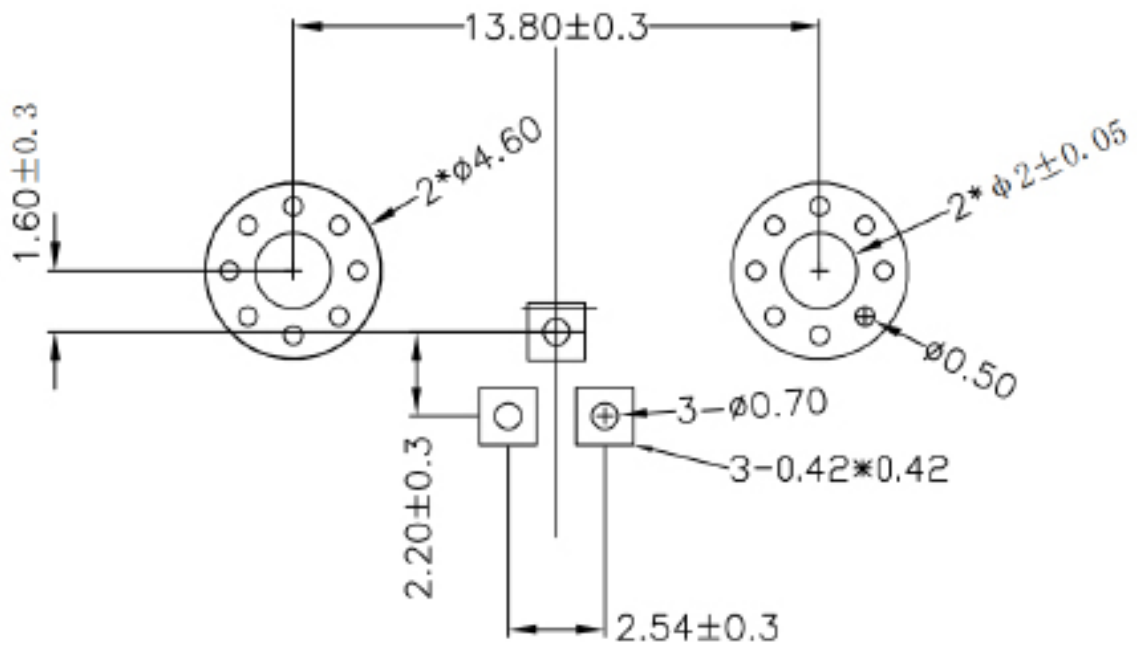


### Note:

Maximum soldering temperature  $260^{\circ}\text{C}$  10s


Maximum PCB thickness 2.4mm

## Dimension (mm, general tolerance $\pm 0.3\text{mm}$ )

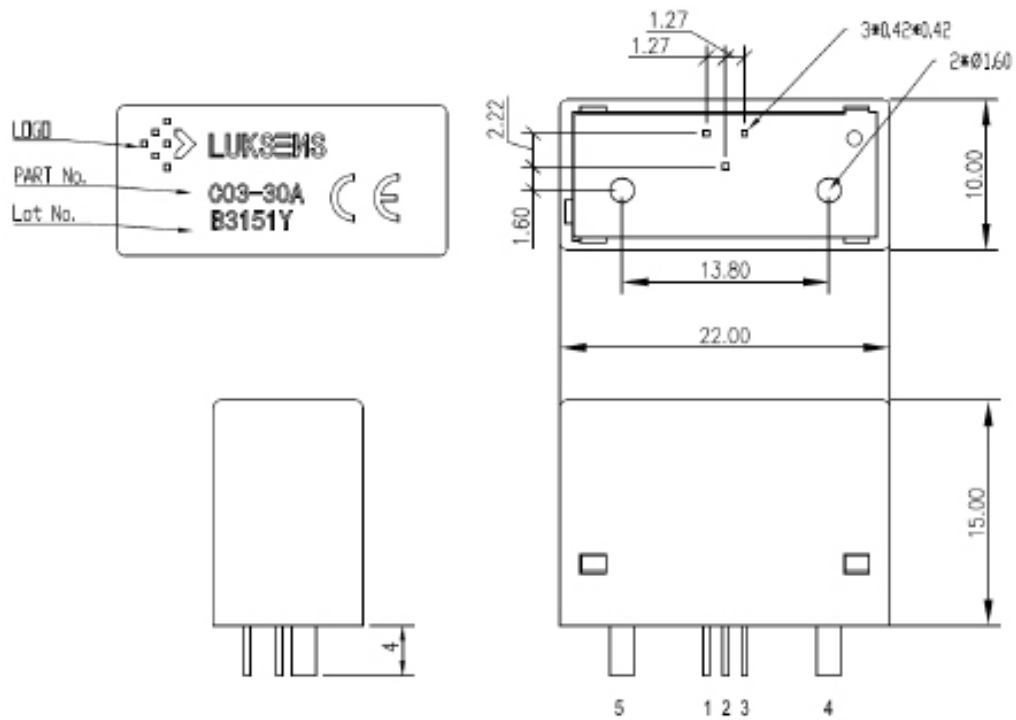

Pin	Symbol
1	$V_{DD}$
2	GND
3	$V_{OUT}$
4	$+I_P$
5	$-I_P$

# Name Guide Description

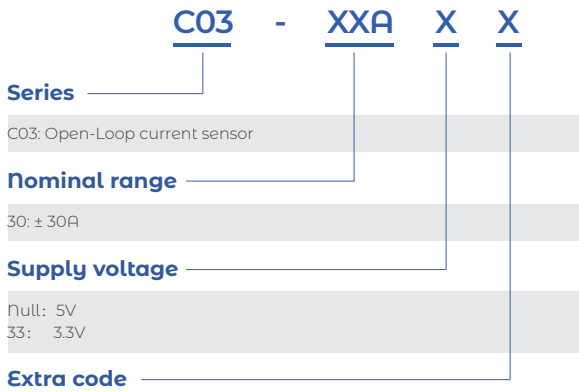

## Notes

The content of this document is subject to revision without notice. Luksens shall have no liability for any error or damage of any kind resulting from the use of this document.

# Safety and Environment



The product is to be installed by manufacturer trained personnel or competent person trained in accordance with manufacturer installation instructions.

With respect to applicable standards IEC 61010-1/ EN 61010-1 *safety requirements for electrical equipment for measurement, control and laboratory use part 1 general requirements*, the product should be used in limited energy secondary circuits.



## Risk of electrical shock

Certain parts of the module can carry hazardous voltage during the operation process of the product because hazardous live voltage of primary conductor, power supply occurs, injury and/or serious damage will be caused if this warning is ignored.

Conducting parts must be inaccessible after installation of the product. Additional protection including shield or protective housing could be used according to IEC 60664 Insulation coordination for equipment within low-voltage supply systems.

Disconnection of the main supply will protect against possible injury and serious damage.



## ESD protection

Damage from an ESD event will occur if the personnel is not well grounded when handling.

## Important notice

Luksens reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Luksens advises its customers to obtain the latest version of the relevant information to verify, before placing any orders. The information included herein is believed to be accurate and reliable. However, since additional design, measure, production, quality control take effect in the end product, therefore Luksens shall have no liability for any potential hazards, damages, injuries or loss of life resulting from the end product.

Luksens products are not to be used in any equipment or system, including but not limited to life support equipment or systems, where failure of Luksens products may cause bodily harm.