


Y06-1000 Current Sensor

The Y06-1000 series is a current transducer which operates on the principle of magnetic compensation. It measures DC, AC or pulse currents and their combinations, with galvanic isolation techniques used to separate the primary and secondary circuits.

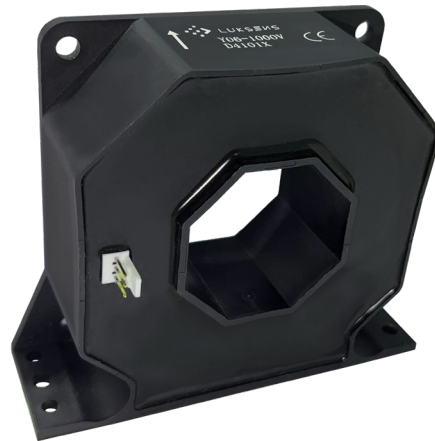

Features

- Non-contact measurement of high current
- Close-Loop measurement (compensated)
- Max. measuring range $\pm 1500\text{A}$ (DC or AC peak)
- Nearly zero magnetic hysteresis
- Superior temperature stability and linearity
- Panel mounting
- RoHs compliance (Lead-Free)

Applications

- Windmill inverters
- Single or three phase inverters
- AC variable speed drives and servo motor drives
- Energy managements
- Propulsion converters

Advantages

- Accurately measures AC, DC and pulse currents
- Fast response $< 1\mu\text{s}$
- High immunity from external interference
- Very low offset drift

Standards

- IEC 60068-2 Series
- EN 61000-4 Series
- EN 50178: 1998
- IEC 62109: 2010
- IEC 61800-3: 2017
- IEC 61800-5-1: 2016

Absolute maximum ratings

Symbol	Parameter	Min.	Max.	Unit
$V_{DD\ max.}$	Maximum supply voltage (not destructive)	-25	25	V
I_{pm}	Maximum measuring current	-1500	1500	A
T_A	Ambient operating temperature	-25	85	°C
T_S	Storage temperature range	-25	90	°C
$V_{ESD-HBM}$	ESD sensitivity HBM (Human Body Model)	8		kV

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

Specifications ($T_A= 25^{\circ}C$, $V_{DD}= \pm 24.0V$)

Symbol	Parameter	Description	Unit
V_{DD}	Supply voltage	$\pm 15 \dots 24$	V
I_C	Current consumption @ $I_p=0$	35	mA
I_{pn}	Current nominal measuring range	± 1000	A
I_{pm}	Maximum measuring current	± 1500	A
K_n	Conversion ratio	1:5,000	
R_s	Coil resistance @ $25^{\circ}C$	< 45	Ω
R_m	Measuring resistance with $\pm 15V$ @ $T_A=70^{\circ}C$	$0 \sim 18 @ \pm 1000 A_{max}$, $0 \sim 7 @ \pm 1200 A_{max}$	Ω
	Measuring resistance with $\pm 24V$ @ $T_A=70^{\circ}C$	$5 \sim 60.5 @ \pm 1000 A_{max}$, $5 \sim 24 @ \pm 1500 A_{max}$	Ω
	Measuring resistance with $\pm 15V$ @ $T_A=85^{\circ}C$	$0 \sim 15 @ \pm 1000 A_{max}$, $0 \sim 4 @ \pm 1200 A_{max}$	Ω
	Measuring resistance with $\pm 24V$ @ $T_A=85^{\circ}C$	$10 \sim 57.5 @ \pm 1000 A_{max}$, $10 \sim 21 @ \pm 1500 A_{max}$	Ω
T_{ctof}	Temperature coefficient of I_{OUT} @ $T_A=-25^{\circ}C \dots 85^{\circ}C$	$< \pm 0.15$	%
T_{ctof}	Temperature coefficient of offset @ $I_p=0$, $T_A=-25^{\circ}C \dots 85^{\circ}C$	$< \pm 0.7$	mA
TEB	Full scale of I_{pn} @ $T_A=-25^{\circ}C \dots 85^{\circ}C$	< 0.5	%/ I_{pn}
ϵ_L	Non-linearity error without offset	< 0.15	%/ I_{pn}
I_{oe}	Offset current @ $I_p=0$	$< \pm 0.4$	mA
I_{om}	Magnetic offset current @ $I_p= 0A \rightarrow I_{pn} \rightarrow 0A$	$< \pm 0.2$	mA
T_R	Step response to 90% of I_{pn}	< 1	μs
BW	Frequency bandwidth (-3dB)	200	kHz

Insulation Parameters

Symbol	Parameter	Value	Unit	Comment
V_o	Insulation voltage for isolation, 50Hz, 1 min	3000	V	
R_{Iso}	Isolation resistance @500VDC	200	MΩ	

General characteristics


Symbol	Parameter	Value	Unit	Comment
m-HSE	Housing material	V0		Flame retardant UL 94
m-FC	Flux collector material	Oriented silicon steel		Superior magnetic permeability
m	Mass	450	grams	

Mechanical characteristics



Symbol	Parameter	Comment
INS_{VET}	Vertical position of installation	Standard-2 holes Ø 5.3 mm, 2 M5 steel screws, 3.2 N.m 4 holes Ø 4.5 mm, 4 M4 steel screws, 2.1 N.m
INS_{HOR}	Horizon position of installation	Standard-4 holes Ø 5.3 mm, M5 steel screws, 3.2 N.m

Dimension (mm)

Y06-1000V

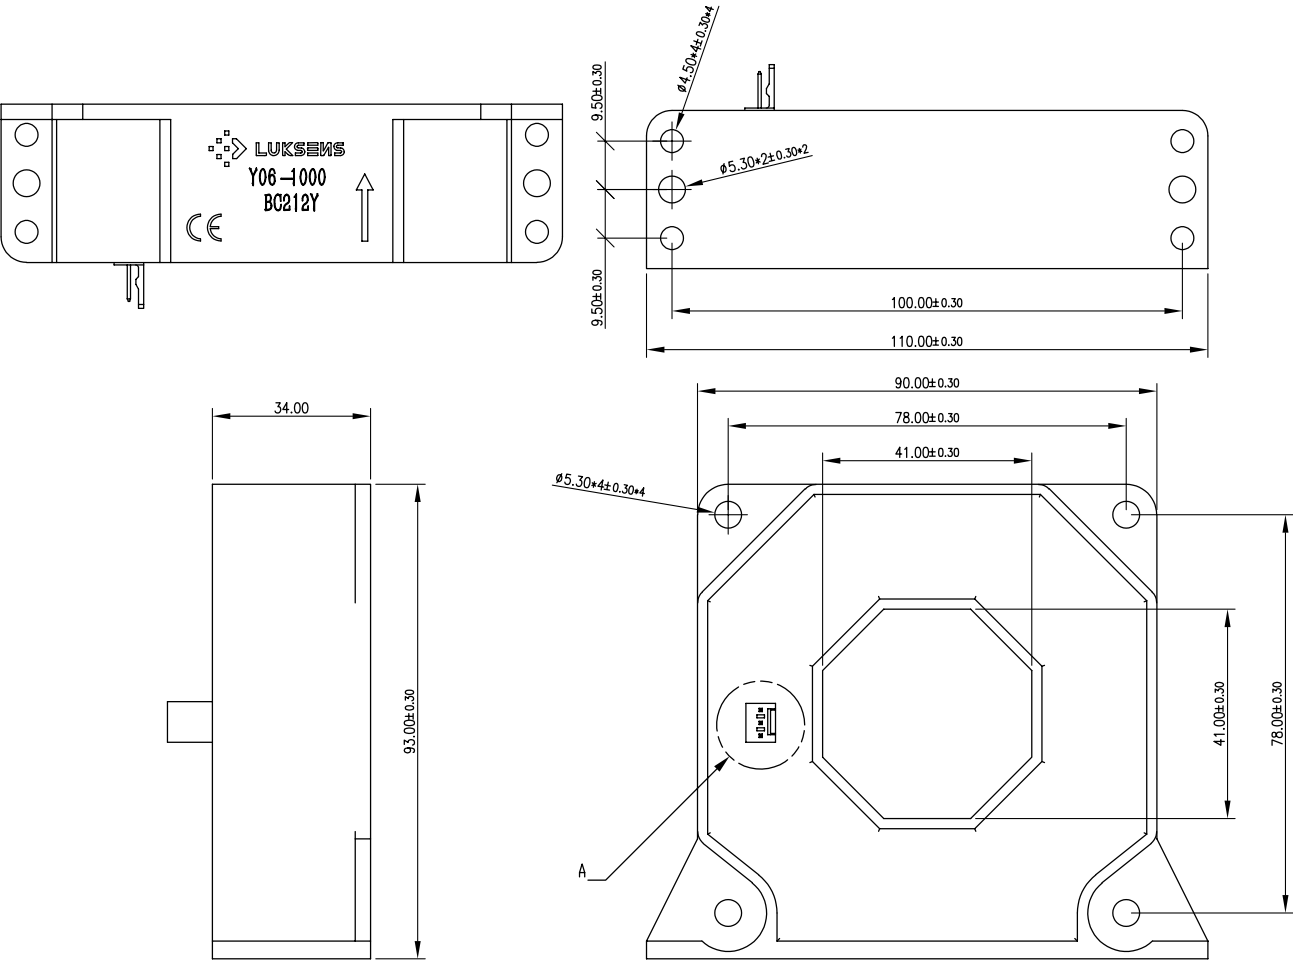


Connection diagram:

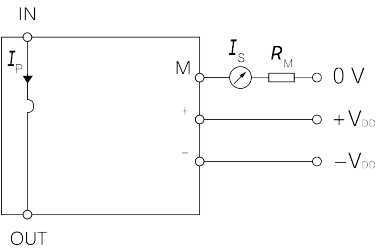

Detail A

Pin	Symbol
1	$+V_{DD}$
2	V_{OUT}
3	$-V_{DD}$

Name Guide Description

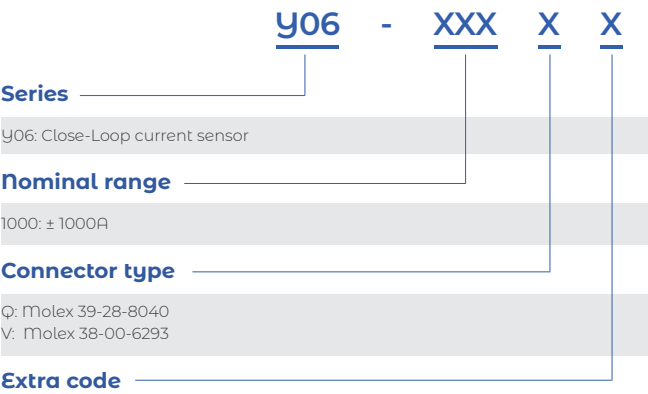

Notes

The content of this document is subject to revision without notice. Luksens shall have no liability for any error or damage of any kind resulting from the use of this document.

Safety and Environment



The product is to be installed by manufacturer trained personnel or competent person trained in accordance with manufacturer installation instructions.

With respect to applicable standards IEC 61010-1/ EN 61010-1 *safety requirements for electrical equipment for measurement, control and laboratory use part 1 general requirements*, the product should be used in limited energy secondary circuits.



Risk of electrical shock

Certain parts of the module can carry hazardous voltage during the operation process of the product because hazardous live voltage of primary conductor, power supply occurs, injury and/or serious damage will be caused if this warning is ignored.

Conducting parts must be inaccessible after installation of the product. Additional protection including shield or protective housing could be used according to IEC 60664 Insulation coordination for equipment within low-voltage supply systems.

Disconnection of the main supply will protect against possible injury and serious damage.



ESD protection

Damage from an ESD event will occur if the personnel is not well grounded when handling.

Important notice

Luksens reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Luksens advises its customers to obtain the latest version of the relevant information to verify, before placing any orders. The information included herein is believed to be accurate and reliable. However, since additional design, measure, production, quality control take effect in the end product, therefore Luksens shall have no liability for any potential hazards, damages, injuries or less of life resulting from the end product.

Luksens products are not to be used in any equipment or system, including but not limited to life support equipment or systems, where failure of Luksens products may cause bodily harm.