

# Y06-500 Series Current Sensor

The Y06-500 series is a current transducer which operates on the principle of magnetic compensation. It measures DC, AC or pulse currents and their combinations, with galvanic isolation techniques used to separate the primary and secondary circuits.



## Features

- Non-contact measurement of high current
- Close-Loop measurement (compensated)
- Max. measuring range  $\pm 800\text{A}$  (DC or AC peak)
- Nearly zero magnetic hysteresis
- Superior temperature stability and linearity
- High frequency bandwidth 100kHz
- RoHs compliance (Lead-Free)

## Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Energy managements
- Uninterruptible power supplies (UPS)
- Switched-mode power supplies (SMPS)
- Overcurrent protections
- Short circuit protections
- Welding applications

## Advantages

- Accurately measures AC, DC and pulse currents
- Fast response  $< 1\mu\text{s}$
- High immunity from external interference
- Excellent current overload capacity

## Standards

- EN 50178:1997
- IEC 61800-5-1:2020
- IEC 61010-1:2010
- IEC 62109-1: 2010

## Absolute maximum ratings

Symbol	Parameter	Min.	Max.	Unit
$V_{DD\ max}$	Maximum supply voltage (not destructive)	-25	25	V
$I_{PM}$	Maximum measuring current	-800	800	A
$T_A$	Ambient operating temperature	-20	70	°C
$T_S$	Storage temperature range	-40	85	°C
$V_{ESD-HBM}$	ESD sensitivity HBM (Human Body Model)		8	kV

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

## Specifications ( $T_A = 25^\circ\text{C}$ , $V_{DD} = \pm 15.0\text{V}$ )

Symbol	Parameter	Description	Unit
$V_{DD}$	Supply voltage	$\pm 15 \dots 24$	V
$I_C$	Current consumption @ $I_p=0$ without $I_{OE}$	<30	mA
$I_{PN}$	Current nominal measuring range	$\pm 500$	A
$I_{PM}$	Maximum measuring current	$\pm 800$	A
$K_N$	Conversion ratio	1:5,000	
$R_S$	Coil resistance @25 °C	< 70	$\Omega$
$R_m$	Measuring resistance with $\pm 15\text{V}$	0~60@ $\pm 500\text{A}_{max}$ , 0~11@ $\pm 800\text{A}_{max}$	$\Omega$
	Measuring resistance with $\pm 18\text{V}$	0~92@ $\pm 500\text{A}_{max}$ , 0~30@ $\pm 800\text{A}_{max}$	$\Omega$
	Measuring resistance with $\pm 24\text{V}$	5~149@ $\pm 500\text{A}_{max}$ , 5~65@ $\pm 800\text{A}_{max}$	$\Omega$
$T_{CIOT}$	Temperature coefficient of $I_{OUT}$ @ $T_A = -20^\circ\text{C} \dots 70^\circ\text{C}$	< $\pm 0.01$	%/°C
$T_{CIof}$	Temperature coefficient of offset @ $I_p=0$ , $T_A = -20^\circ\text{C} \dots 70^\circ\text{C}$	< $\pm 0.4$	mA
$TEB$	Full scale of $I_{PN}$ @ $T_A = 25^\circ\text{C}$	<0.6	%/ $I_{PN}$
$\epsilon_L$	Non-linearity error @ $\pm I_{PN}$ without offset	<0.1	%/ $I_{PN}$
$I_{OE}$	Offset current @ $I_p=0$	$\pm 0.2$ Typ. / $\pm 0.4$ Max.	mA
$I_{om}$	Magnetic offset current at $I_p = 0\text{A} \rightarrow I_{PN} \rightarrow 0\text{A}$	<0.2	mA
$T_R$	Step response to 90% of $I_{PN}$	<1	$\mu\text{s}$
<b>BW</b>	Frequency bandwidth (-1dB)	100	kHz
<b>di/dt</b>	di/dt accurately followed	>100	A/ $\mu\text{s}$

## Insulation Parameters

Symbol	Parameter	Value	Unit	Comment
$V_D$	Insulation voltage for isolation, 50Hz, 1 min	4000	V	
$R_{ISO}$	Isolation resistance @500VDC	>500	M $\Omega$	

## General characteristics


Symbol	Parameter	Value	Unit	Comment
<b>m-HSE</b>	Housing material	V0		Flame retardant UL 94
<b>m-FC</b>	Flux collector material	Oriented silicon steel		Superior magnetic permeability
<b>m</b>	Mass	251	grams	

## Mechanical characteristics


Symbol	Parameter	Comment
<b>INS<sub>VERT</sub></b>	Vertical position of installation	Standard-6 holes $\varnothing$ 4.3 mm, 6 steel screws M4 , 3.2 Nm Option-4 holes $\varnothing$ 1.9 mm, 4 screws PTKA25, length: 6mm
<b>INS<sub>HOR</sub></b>	Horizon position of installation	Standard-4 holes $\varnothing$ 4.3 mm, 4 steel screws M4 , 3.2 Nm Option-4 holes $\varnothing$ 1.9 mm, 4 screws PTKA25, length: 10mm
<b>H<sub>PRE</sub></b>	Primary through-hole	$\varnothing$ 30.2 mm Max.

# Dimension (mm)


## Y06-500Q

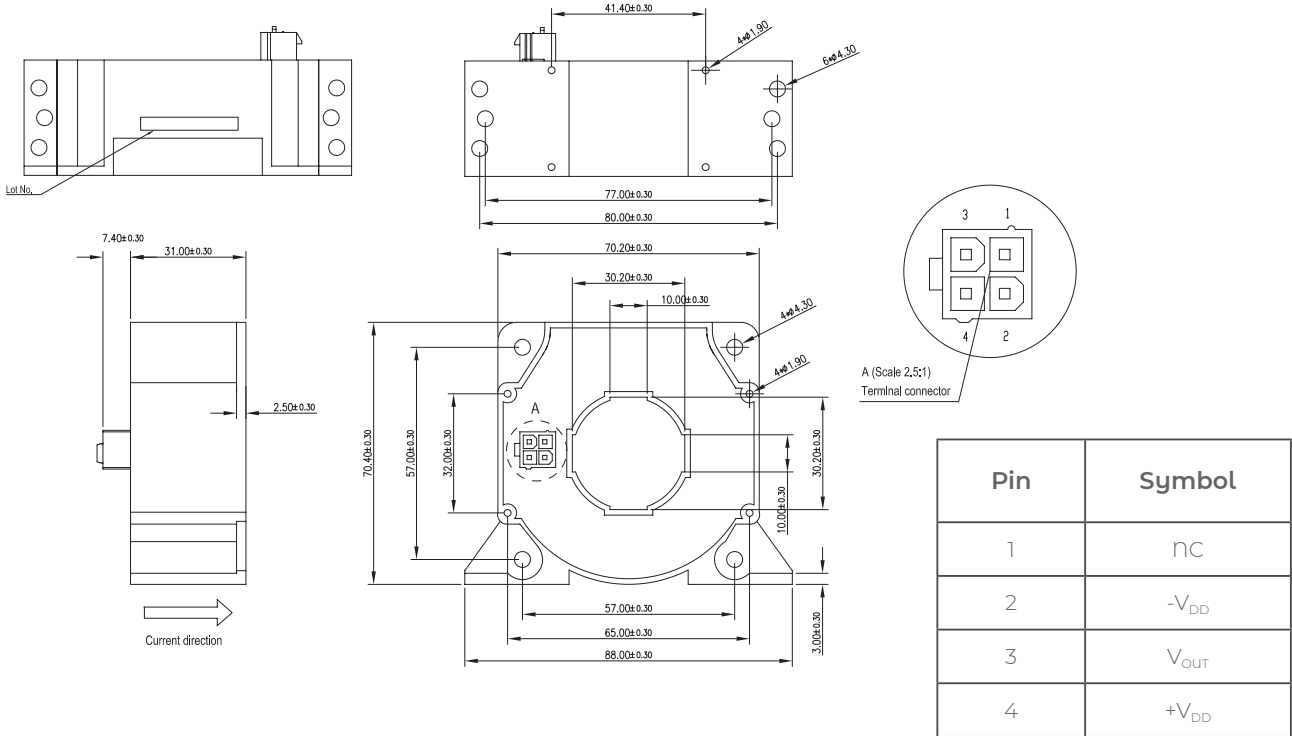


## Y06-500V

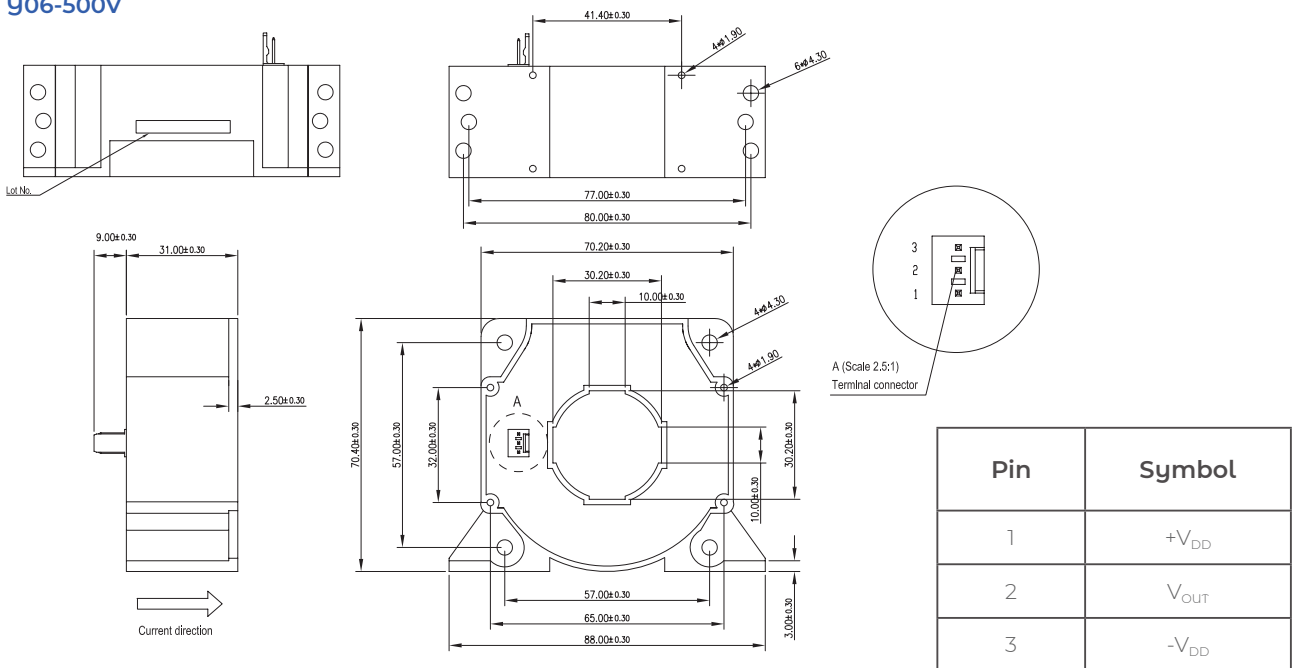

### Connection diagram:



# Name Guide Description

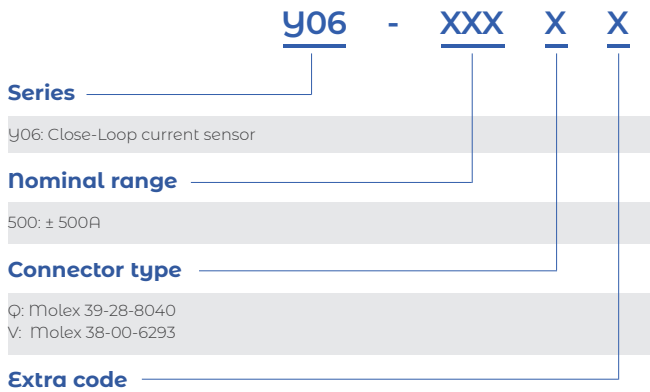

## Notes

The content of this document is subject to revision without notice. Luksens shall have no liability for any error or damage of any kind resulting from the use of this document.

# Safety and Environment



The product is to be installed by manufacturer trained personnel or competent person trained in accordance with manufacturer installation instructions.

With respect to applicable standards IEC 61010-1/ EN 61010-1 *safety requirements for electrical equipment for measurement, control and laboratory use part 1 general requirements*, the product should be used in limited energy secondary circuits.



## Risk of electrical shock

Certain parts of the module can carry hazardous voltage during the operation process of the product because hazardous live voltage of primary conductor, power supply occurs, injury and/or serious damage will be caused if this warning is ignored.

Conducting parts must be inaccessible after installation of the product. Additional protection including shield or protective housing could be used according to IEC 60664 Insulation coordination for equipment within low-voltage supply systems.

Disconnection of the main supply will protect against possible injury and serious damage.



## ESD protection

Damage from an ESD event will occur if the personnel is not well grounded when handling.

## Important notice

Luksens reserves the right to change the specifications, including all statements and data appearing in Luksens' catalogues, data sheets and advertisements, without notice. Luksens will publish the modified specifications on its website. If such changes to specifications are made, Luksens shall have no obligation to provide the change on Products previously purchased. The information included herein is believed to be accurate and reliable. However, since additional design, measure, production, quality control take effect in the end product, therefore Luksens shall have no liability for any potential hazards, damages, injuries or loss of life resulting from the end product. Luksens products are not to be used in any equipment or system, including but not limited to life support equipment or systems, where failure of Luksens products may cause bodily harm.